


State of West Virginia  
Source Water Assessment and Protection Program  
Source Water Assessment Report

Revised Report

Leight's MHP  
PWSID WV3301920  
Jefferson County

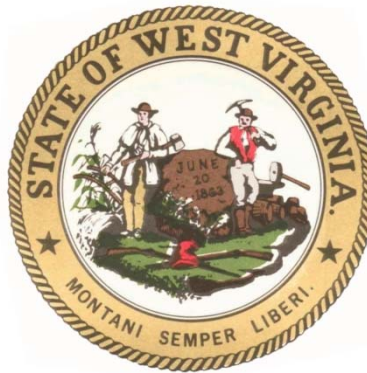

Prepared by:

West Virginia Department of Health and Human Resources  
Bureau for Public Health  
Office of Environmental Health Services  
Source Water Protection Unit

July 16, 2012

## TABLE OF CONTENTS

Introduction .....	3
What is the Purpose of this Revised Report? .....	3
Table 1 Public Water Supply Information .....	3
What is my Well's Source Water Protection Area? .....	4
What is SWAP? .....	4
What is Susceptibility?.....	4
How Was my Well's Susceptibility Determined? .....	4
Table 2 Source of Your Drinking Water - Hydrogeologic Setting .....	5
Table 3 Physical Integrity of Well .....	6
Table 4 Water Quality and Water Treatment Information .....	6
Evaluation of Significant Potential Sources of Contamination .....	7
Table 5 Potential Contaminant Sources .....	8
Next Step: .....	11
Contingency Planning .....	11
Alternative Sources .....	11
Management Planning.....	11
Need additional information? .....	12
Figure 1: Leight's MHP Location Map .....	12
Figure 2: Leight's MHP Source Water Protection Area .....	13
Glossary of Terms .....	14

# **GROUND WATER PUBLIC SUPPLY SYSTEMS**

## **SOURCE WATER ASSESSMENT AND PROTECTION (SWAP) PROGRAM**

### **REPORT**

*Prepared by: West Virginia Department of Health and Human Resources (WVDHHR), SWAP Program*

#### **INTRODUCTION**

##### **What is the Purpose of this Revised Report?**

A Source Water Assessment Report was previously prepared for Leight's MHP by West Virginia Department of Health and Human Resources, Bureau for Public Health, Office of Environmental Health Services, Source Water Protection Unit in November 2003. Leight's MHP is located approximately 0.8 miles south of Middleway, West Virginia along County Route 1.

A source location and activity status verification and updated Potential Contaminant Source (PCS) survey was conducted by WVDHHR personnel on January 24, 2012. This revised assessment report is based on this recently updated information. The original assessment delineated an area of 288 acres (2,000 foot radius around the source wells) as the Source Water Protection Area (SWPA). This revised report maintains this same protection area configuration but provides additional information on probable direction of regional ground water flow. It also includes Potential Contaminant Sources outside of the designated protection area that could impact water quality.

This concept of source water protection is a preventative approach and complements the effort of proper treatment and disinfection by the individual water supply systems. This assessment is one step in a multilevel approach to ensure a safe future supply of water by understanding what potential threats exist.

This Source Water Assessment Public Summary is to provide information to support local and state efforts to protect public drinking water source and to maintain a safe and dependable water supply for the protection of human health by preventing contamination. The costs of these preventative measures will rarely exceed the cost of remediating a public water supply once it is contaminated.

The emphasis of this assessment is on "source" water rather than the "tap" water. Information on tap water quality is available in the Consumer Confidence Report, which can be obtained from your local water supplier.

This report identifies the significant potential contaminant sources that could threaten source(s) water quality. Your susceptibility ranking does not imply poor water quality. Actual water quality is best reflected by results of regular water tests. Please refer to Table 1 for an informational summary of your public water supply.

**Table 1 Public Water Supply Information**

<b>PWS Name</b>	Leight's MHP
<b>Address</b>	2626 Hinton Road
<b>City, State, Zip</b>	Kearneysville, West Virginia 25430
<b>PWSID#</b>	WV3301920
<b>County</b>	Jefferson County
<b>System Type</b>	Community

## **What is my Well's Source Water Protection Area?**

A well(s) source water protection area (SWPA) is the land around the well where protection activities should be focused. The SWPA is the area that is likely contributing water to the well. Please refer to Figure 2 for your SWPA.

## **What is SWAP?**

The SWAP, established under the Safe Drinking Water Act, requires every state to:

- Delineate the area from which a public water supply system receives its water;
- Inventory land uses within the recharge areas of all public water supplies;
- Assess the susceptibility of drinking water sources to contamination from these land uses;
- Publicize the results to provide support for improved protection of sources.

The WVDHHR SWAP will complete all of these components of a source water assessment.

## **What is Susceptibility?**

Susceptibility is a measure of your well field's potential to become contaminated by land uses and activities within the SWPA. The purpose of a susceptibility analysis is to provide an overview to actions a public water system may take to further reduce the susceptibility to their drinking water supply. Because public water supply wells have been constructed in various hydrologic settings and have a range of potentially significant contaminant sources, best professional judgment has been used in determining the susceptibility of each public water system to contamination. The possibility of a release from potential contaminant sources is greatly reduced if Best Management Practices (BMP's) are used. The susceptibility determination for your well did not take into account whether BMP's are being used.

Susceptibility of drinking water does not mean a customer will drink contaminated water. Water suppliers protect drinking water by monitoring and treating water supplies, and using BMP's and source water protection measures to ensure that safe water is delivered to the tap.

## **How Was my Well's Susceptibility Determined?**

Your well field's susceptibility is based on the following parameters:

- Review of the hydrologic setting (ease of contamination transport through each materials present in the local hydrologic setting);
- Review of the physical integrity of the well(s);
- Review of available ground water quality data;
- Characterization of the potential significant contaminant sources identified in the SWPA;
- Integration of this information to identify the greatest threats to the source water and suggestions of appropriate protection strategies or activities.

**Table 2 Source of Your Drinking Water - Hydrogeologic Setting**

Well Name	Geologic Setting/Sensitivity
Well 1	Karst Area/ High Sensitivity
Well 2	Valley and Ridge (fracture)/ Moderate Sensitivity

The Leight's MHP water system serves a population of approximately 78 people. The supply is from two source wells. Total raw water production is approximately 6,600 GPD. The source wells are located in the Valley and Ridge Province and a karst area of West Virginia.

The Valley and Ridge Province consists of complex faulted blocks that contain either localized-confined or localized unconfined aquifers, or lack of aquifers. The aquifers may be porous media or fractured rock. Karst areas consist of underlying karstified limestone or dolostone with subterranean drainage.

The source wells are located along the east limb of the Massanutten Anticlinorium. Rock units within the SWPA include those of the Rockdale Run, Pinesburg Station and Stonehenge Limestone Formations of the Beekmantown Group, the Martinsburg Formation, and the Trenton/Black River Group.

The source wells are located in a known karst area characterized by karstified limestone or dolostone with subterranean drainage. Surface waters can enter the ground water regime very quickly via direct injection through sinkholes or other fracture or solution openings. The type of flow in karst areas is described as being conduit flow and is delivered via strike oriented cave passages or along fault planes and fault passages (Figure 2).

The source wells are located within the 100 year flood plain and could be subject to entry of contaminated surface water during a flood event. Precautions should be taken to prevent entry of contaminants through the well seal or an ungrouted well casing during such events.

The estimated land area (approximately 288 acres) that may contribute water to the wells is depicted in the attached map (Figure 2) as the Source Water Protection Area. However, in karst areas, source water and contaminant sources may originate from greater distances than encompassed by this interim delineation.

Although this revised report maintains the same protection area configuration defined in the original SWAR, additional information is provided on probable direction of regional ground water flow based on published reports (see reference list below), local geologic structure, and topography. PCSs outside of the designated protection area that could impact water quality are also included (Figure 2). Future revisions to the SWPA may occur as additional geohydrologic information becomes available.

#### References

Kozar, M. D., and Weary, D. J., 2009, Hydrogeology and ground-water flow in the Opequon Creek watershed area, Virginia and West Virginia: U.S. Geological Survey Scientific Investigations Report 2009-5153, 61 p.

Geohydrology and water quality of the Leetown Area, West Virginia, by Mark D. Kozar, Kurt J. McCoy, David J. Weary, Malcolm S. Field, Herbert A. Pierce, William B. Schill, and John A. Young: U.S. Geological Survey Open-file Report 2007-1358, 100 p, <http://pubs.usgs.gov/of/2007/1358>.

Kozar, M. D., Hobba, W. A., and Macy, J. A., 1991, Geohydrology, water availability, and water quality of Jefferson County, West Virginia, with emphasis on the carbonate area: U.S. Geological Survey Water-Resources Investigations Report 90-4118, 93 p.

**Table 3 Physical Integrity of Well**

Well Name	Source Integrity
Well 1	Meets Standards
Well 2	Meets Standards

Wells may vary in their construction characteristics and in the geologic rock types in which they occur. The lack of an effective grout and sanitary seals are avenues by which contaminants from nearby surface water bodies or overland runoff can percolate to wells.

**Table 4 Water Quality and Water Treatment Information**

Well Name	Results
Well 1	Meets Standards
Well 2	Meets Standards

The Ground Water Under the Direct Influence (GWUDI) assessment evaluates contaminants that may enter the water drawn directly from the well. The Leight's MHP Wells 1 and 2 were designated NOT GWUDI by letter dated October 18, 2012. The contaminants addressed in this assessment include those regulated under the Safe Drinking Water Act as well as those the WVDHHR has determined may present a concern to public health. Periodic analysis for a variety of bacterial, organic, nitrate, synthetic and inorganic contaminants in the water after treatment have consistently yielded values below the maximum contaminant level (MCL) as regulated by the Safe Drinking Water Act. Drinking water that meets MCL standards is associated with little or no health risk. Because sampling requirements are for treated water, the lack of water quality impacts does not necessarily indicate a lack of contamination. This determination is limited by the sampling that is performed for the water system.

All drinking water including bottled water may reasonably be expected to contain small amounts of some contaminants. The presence of contaminants does not necessarily indicate that water poses a health risk. For further information regarding the quality of the system's finished water, please refer to the Consumer Confidence Report or call the Environmental Protection Agency's Safe Drinking Water Hotline at 1-800-426-4791 or contact your local health provider for more information about contaminants and potential health effects.

## **EVALUATION OF SIGNIFICANT POTENTIAL SOURCES OF CONTAMINATION**

The inventory for Leight's MHP consists of approximately 24 significant Potential Contaminant Sources (PCS) of which 5 are considered higher threats to ground water. Please refer to Table 5 for a listing of identified PCSs and Figure 2 for their locations within the SWPA. Regulated facilities and activities are listed in Table 5 (if present within the SWPA). Their locations are also displayed on the Figure 2.

Some PCSs that are located outside of the SWPA may be included for information purposes. Water supply wells are not identified on the map for security reasons. Some facilities are not located on the SWPA map as they occur over broad geographic areas (agricultural fields, highways, and railroad right-of-ways).

Each significant potential source of contamination has been analyzed and prioritized (low, moderate, and high, unless otherwise noted) relative to its potential to impact the water supply. It is important to note that the links between the PCS and the primary contaminant types are not intended to be comprehensive, but only those commonly associated with the PCS. Any potential source may have one or more types of contaminants associated with the chemicals indicated. Threat rankings are a combination of the perceived risk of the release of a contaminant from a land use area, the migration route of the contaminant to the well and the relative public health risk of the contaminant itself. The risk rankings are based on the general nature of their activities and the contaminants associated with them, not on facility specific information, such as management practices. This ranking does not take into consideration any unforeseen releases or the dynamics of new PCS's within the delineated SWPA.

A detailed risk assessment of PCS's was beyond the scope of what could be accomplished with available resources and data. A detailed risk analysis is more meaningful when prepared by local decision makers as the bridge from assessment work to protection strategies.

**Table 5 Potential Contaminant Sources**

<b>Sequential No.</b>	<b>Map Code</b>	<b>PCS Name</b>	<b>PCS Category</b>	<b>Associated Chemicals</b>	<b>Threat to GW</b>
1	R-4	Residential (single family)	Residential	VOC, SOC, NN	H
2	R-6	Septic Systems (leach field)	Residential	MP, VOC, SOC, TO, NN	M
3	A-18	Pasture	Agriculture	MP, SOC	L
4	C-10	Construction Areas	Commercial	M, T, PH, VOC, SOC, HM	M
5	A-5	Crops: corn, soybean, wheat	Agriculture	NN, SOC, MP	L
6	A-18	Pasture	Agriculture	MP, SOC	L
7	A-7	Crops: other	Agriculture	NN, MP, SOC	L
8	C-9	Cemeteries	Commercial	M, SOC, PH	L
9	C-49	Utility Substation Transformers	Commercial	PH, VOC, SOC	H
10	A-7	Crops: other	Agriculture	NN, MP, SOC	L
11	A-7	Crops: other	Agriculture	NN, MP, SOC	L
12	A-7	Crops: other	Agriculture	NN, MP, SOC	L
13	A-7	Crops: other	Agriculture	NN, MP, SOC	L
14	A-7	Crops: other	Agriculture	NN, MP, SOC	L
15	C-9	Cemeteries	Commercial	M, SOC, PH	L
16	C-9	Cemeteries	Commercial	M, SOC, PH	L
17	C-9	Cemeteries	Commercial	M, SOC, PH	L
18	R-4	Residential (single family)	Residential	VOC, SOC, NN	H
19	R-4	Residential (single family)	Residential	VOC, SOC, NN	H
20	C-53	Other: Photographic Plate Manufacturer (inactive)	Commercial	SOC, M, HM	M



21	A-7	Crops: other	Agriculture	NN, MP, SOC	L
22	R-4	Residential (single family)	Residential	VOC, SOC, NN	H
	M-7	Highway (County Route 1)	Municipal	PH, VOC, M	M
<b>Regulated Facilities</b>					
R1	D-3	NPDES Permitted Discharge (inactive)	Database	M, VOC, SOC, D, MP, NN	L

Index to Associated Chemicals is as follows:

MP	Microbiological Pathogens: Total/Fecal Coliform, Viruses, Protozoa
NN	Nitrate/Nitrite
VOC	Volatile Organic Compounds
HM	Heavy Metals
M	Metals
SOC	Synthetic Organic Compounds
T	Turbidity
TO	Taste and Odor precursors
R	Radionuclides
PH	Petroleum Hydrocarbons
D	Disinfection byproducts
ND	Not Determined

Based on this summarized narrative and susceptibility review for each well, the overall susceptibility for Well 1 and Well 2 of the Leight's MHP indicates a high susceptibility to the identified potential sources of contamination.

For this susceptibility analysis, the State combined the inventory results with other relevant information to decide how likely a water supply may become contaminated by the identified potential sources of contamination. This step makes the assessments useful for communities, since it provides information that local decision-makers use to prioritize approaches for protecting the drinking water supply. It does not mean that these wells are currently contaminated or that these wells are going to be contaminated in the near future, but the potential does exist.

## **RECOMMENDATION FOR YOUR SOURCE WATER ASSESSMENT AND PROTECTION ACTIVITIES**

The following list provides specific recommendations for your source water assessment and protection activities.

- An aquifer protection management program should be developed for the well. Preferably, the protection plan should be developed for the entire SWPA with the cooperation of neighboring towns, county, and state agencies. It is recommended that protection and management efforts should focus on obtaining additional information on the sources present to evaluate their risk.
- Plan for and complete the proper abandonment of all inactive supply wells.
- Reduce existing chronic threats by obtaining further detailed information concerning Leaking Underground Storage Tanks (LUST's) or other Underground Storage Tanks (UST's) within the SWPA that are now in service or were in the past. This information should include the type of leak detection and corrosion protection currently being used at the facility.
- Investigate what types of preventative pollution measures are being conducted by the industrial or commercial facilities located within the SWPA. Some facilities may already have developed their Groundwater Protection Plan (GPP) for their facility.
- Inspect the SWPA regularly.
- Implement Land Use Planning tools to influence future developments within the SWPA. One way to accomplish this is to join forces with the county to adopt a zoning ordinance that would govern certain uses that are considered high threats to ground water.
- Provide maps of the SWPA to the County Planning Commission or other appropriate county agency to make them aware of the location of proposed development in relation to the water supply source.
- Establish funds to purchase land banks of critical areas (e.g. around sinkholes, wells, springs) to preserve the areas from future development.
- Support and encourage the implementation of Best Management Practices for agricultural areas including grazing lands, crop production farms, and orchards. In addition, support information can be provided to residents and commercial users to encourage the reduction in over use of common pesticides and fertilizers.

- Implement systems for regular collection of hazardous waste from residents. For example, the Eastern Panhandle Soil Conservation District and the Berkeley County Solid Waste Authority has helped organize amnesty days in the past where residents could bring in all types of hazardous wastes without threat of punishment.
- Encourage and implement public education about your water supply regarding its susceptibility to contamination and ways to protect. This could come in the form of brochures containing information and advice about ground water and the local terrain. For example, the Berkeley County Health Department has an on-going educational program that is presented to all fourth graders in the county.
- Support and encourage the identification of contamination incidents by citizens.
- Include information regarding contamination and source water protection in mailings to homeowners, including non-emergency contact information. Reduce the amount of septic systems in use by extension of the public sewer system or other approved systems.

#### **NEXT STEP:**

The next step in source water protection planning is to prepare or update a Source Water Protection Plan (SWPP) plan. The SWPP plan incorporates this source water delineation and assessment report and the following additional sections:

#### **Contingency Planning**

A contingency plan documents the system's planned response to interruption of the source water.

#### **Alternative Sources**

Information pertaining to alternative water sources focusing on long-term source replacement should the system be required to develop a new source of water due to contamination (or other reasons). This section outlines the most likely sources that can be utilized.

#### **Management Planning**

Management planning is the most important element of SWAP. The management plan identifies specific activities that will be pursued by the system to protect their water resources. The system will benefit by taking a proactive approach to source water protection in their source water protection area. It is anticipated that most of the management effort will focus on coordination with government agencies and periodic surveys of the watersheds. It may be necessary to conduct a limited number of special studies to determine actual risk and consequences for selected contaminant sources. This information may be needed before decisions can be made on management activities.


## NEED ADDITIONAL INFORMATION?

To obtain additional information and/or links, visit the WVDHHP Web site at <http://www.wvdhhr.org/oehs/eed/swap/> or call the SWAP Program at 304-558-2981.

**\*Disclaimer - The coverage presented in this program are under constant revision as new sites or facilities are added. They may not contain all the potential or existing sites or facilities. The West Virginia Bureau for Public Health is not responsible for the use or interpretation of this information.**


Maps contained in this source water assessment report are provided as a public service by the West Virginia Bureau for Public Health. The Bureau makes no representation regarding completeness or accuracy of the data presented thereon. Efforts are made to verify and update the data used to generate the maps. However, with data sets of this size and nature, eliminating all errors is difficult. Thus, the user assumes total responsibility for verification.

Please report any inaccuracies on either the map or inventory by calling the SWAP Program at 304-558-2981.

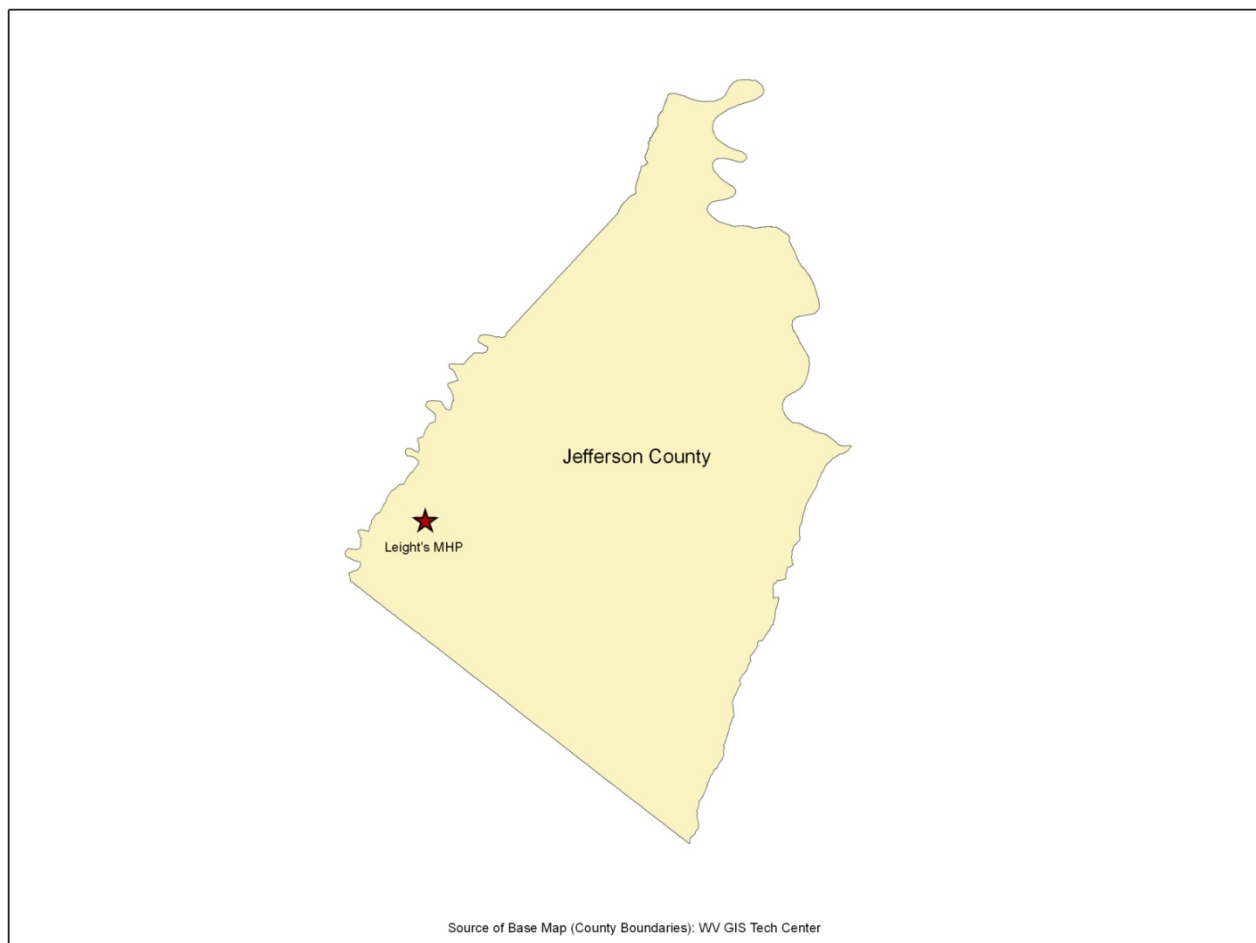

**Figure 1: Leight's MHP Location Map**



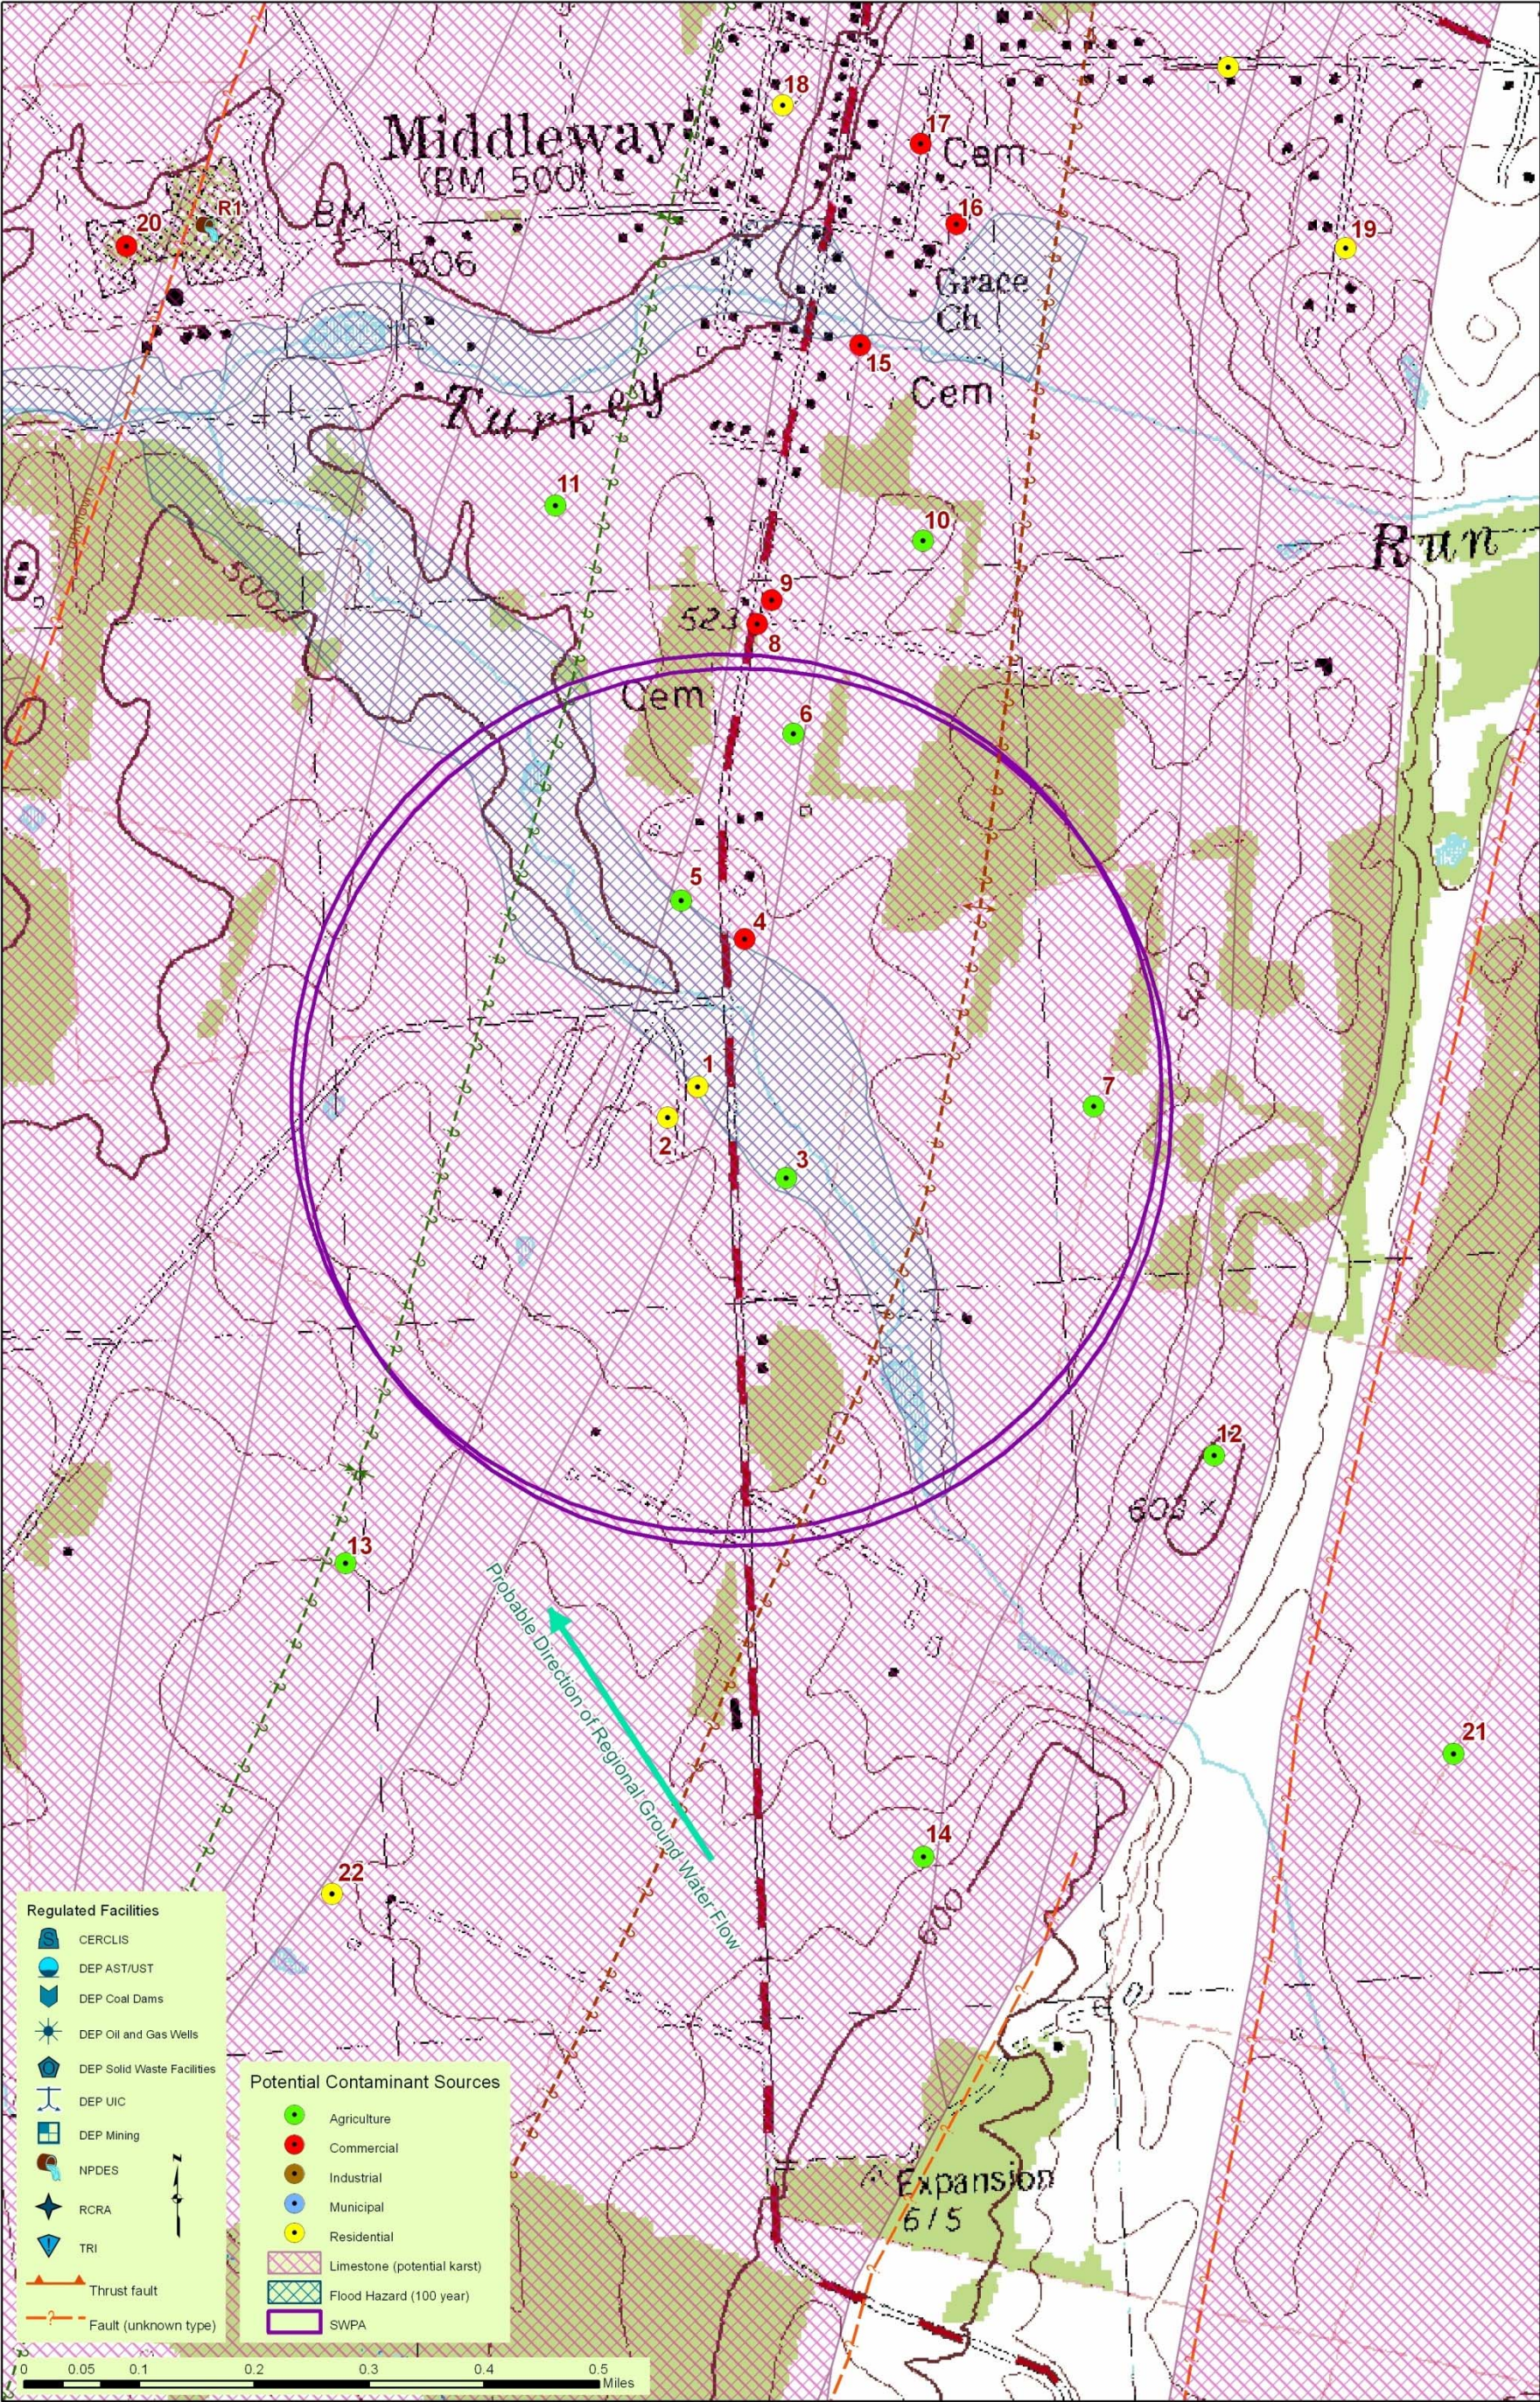

Source of Base Map (USGS 1:24,000), Geological Features, Structural Features, and Flood Data: WV GIS Tech Center and WVGES

J. Northeimer SWAP EED 7/10/2012

Figure 2: Leight's MHP Source Water Protection Area



## GLOSSARY OF TERMS

Alluvium - Sediments deposited by moving rivers.

Aquifer - A formation, group of formations, or part of a formation that contains sufficient saturated permeable materials to yield sufficient, economical quantities of water to wells and springs.

Conjunctive Delineation – In cases where a “ground water” source is designated as Ground Water Under the Direct Influence (GWUDI), an additional delineation in addition to the five (5) year time of travel/recharge delineation for ground water will be completed. The additional delineation will account for stream segments outside of the ground water delineation in cases where the area of surface influence is known or reasonably suspected. It should be noted in karst situations particularly, the surface link is not always an adjacent stream, but could come from a stream miles away. In these cases a conjunctive delineation may not always be performed.

Contamination - The addition to water of any substance or property preventing the use of reducing the usability of the water for ordinary purposes such as drinking, preparing food, bathing, washing, recreation, and cooling

Flood Plain - Any land area susceptible to inundation by floodwater from any source.

GWUDI or "Ground Water Under the Direct Influence" - is defined by the EPA as water beneath the surface of the ground with either a significant occurrence of insects or other macro organisms, algae, or large diameter pathogens such as Giardia lamblia or Cryptosporidium or other water characteristic such as turbidity, temperature, pH or conductivity.

Hydrogeologic Setting - Evaluates the sensitivity of an aquifer. The likelihood of a contaminant reaching a well or spring is a function of the ground water flows patterns, the rate of flow, the distance to the source and the hydraulic characteristics of the contaminant. The technical factors include the well(s) pumping rate and spring flow, the direction, slope and elevation of the water table, transmissivity and storativity characteristics of the aquifer, overlaying material and recharge rate for ground water systems.

100-year Flood Plain - The area adjoining a river, stream, or water course covered by water in the event of a 100 year flood.

100 -year Flood - The flood having a one percent chance of being equaled or exceeded in magnitude in any given year. Contrary to popular belief it is not a flood occurring once every 100 years.

Karst - A term denoting a formation containing soluble rocks, underground solution passages, sinkholes and springs.

Infiltration - The process of, or fluids, entering the soil and recharging aquifers rather than becoming runoff.

Maximum Contaminant Level (MCL) - Defined as the maximum permissible level of a contaminant in water, which is delivered to any user of a public water system.

Physical Integrity of the Well or Spring - This analysis evaluates and reviews the integrity of the well or spring structures needed to protect the water source from a potential contaminant source(s). It is recognized that protective well construction characteristics can prevent the occurrence of contamination even in the presence of potentially significant contaminant sources. The design and construction of a well should include casing without cracks; tight joints between lengths of casing; adequate grout between the casing and bore hole and location (floodplain or flooding area). A spring must be protected with “shoe box” type lid enclosure that is screened and locked to prevent unauthorized entry. Surface water runoff diversion and land use of the recharge area are paramount elements to evaluate. These features provide reasonable assurance that contaminants will not enter the well or spring through any pathway, and allow operators to focus on the potential for contaminants to migrate through the aquifer and enter into the well(s) or spring. However, even a well(s) and springs constructed to the most exacting standards may

lose structural integrity with time. Maintenance records of remedial improvements also will be reviewed in evaluation of integrity.

Potential Contaminant Source (PCS) - A facility or container or route of travel that could release a sufficient amount of a harmful contaminant that upon entering an aquifer or surface stream could contaminate it past the level of human health concerns.

Public Water System - is any water system or water supply which regularly supplies or offers to supply, piped water to the public for human consumption, if serving at least an average of twenty-five (25) individuals per day for at least sixty (60) days per year, or which has at least fifteen (15) service connections.

Recharge - Water entering the upper end of a groundwater flow system.

Remediation - The removal of contaminants from soil and/or ground water.

Sensitivity of the Source Water Protection Area (SWPA) - refers to the hydrologic or hydrogeologic characteristics that affect the transport of the contaminant from a source of contamination to a well or intake.

Source Water Assessment and Protection (SWAP) Program - The program established by the 1996 Amendments to the Safe Drinking Water Act (SDWA) which expanded the initial Wellhead Protection Program to all public drinking water supply systems including surface water systems. This program is to assess, preserve, and protect the source waters which are used to supply water for public drinking water supply systems and to provide a long term availability of an abundant supply of safe water in sufficient quantity for present and future citizens of the State. This program also enables the water supply owners, consumers, and others to initiate and promote actions to protect their drinking water supplies with the developed information.

Source Water Protection Area (SWPA) - refers to the area delineated by the State for a public water system, or including numerous public water systems, whether the source is ground water, surface water or both, as part of the West Virginia SWAP approved by the EPA under section 1453 of the Safe Drinking Water Act.

Susceptibility - The likelihood that a release from a PCS would contaminate and render unusable a drinking water supply such as aquifers or surface streams.

Unconfined Aquifer - An aquifer over which there is no confining layer.

Water quality - Available data will be evaluated to help direct protection activities. If the water quality impact is known, evaluating the source(s) present may help to determine the origin of the contamination and where immediate protection efforts should be focused

Well(s) - refers to ground water intakes including the well structure (i.e., casing, etc) and wellhead.

Wellhead Protection Area (WHPA) - The surface and subsurface area surrounding a water well or well field, supplying a public water system, through which contaminants are reasonably likely to move toward and reach such water well or well field. This area is delineated by the State for ground water source public water systems. The former Wellhead Protection Program (WHPP) is now part of the Source Water Assessment and Protection (SWAP) Program.